TECHNICAL DATASHEET OF
FIRE BRIGADE INLET FOUR WAY INLET BREACHING




Fire Brigade Inlet Four Way Inlet Breaching	
Reference Standard	IS : 904
Inlet	Four Male Instantaneous Inlet of 63 mm With Built in Non returnable Valve
Outlet	Flanged 150mm
Material of Construction For Body	CI TO IS 210
Material of Construction For Non returnable Valve	GM TO IS 318 LTB-II

Industrial Estate, Veera Desai Road, Andheri (W), Mumbai - 400053. Telephone : +91 22 2673 1828/ 2673 1852/ 4601 4392
WORKS: D-24/6, TTC Industrial Area, MIDC, Turbhe, Navi Mumbai - 400705. Telefax: 27634433 / 64512311/64523611.
Email : orders@intimefire.com, ho@intimefire.com **: Website:** www.intimefire.com

TECHNICAL DATASHEET OF
FIRE BRIGADE INLET FOUR WAY INLET BREACHING

FOUR WAY INLET BREACHING

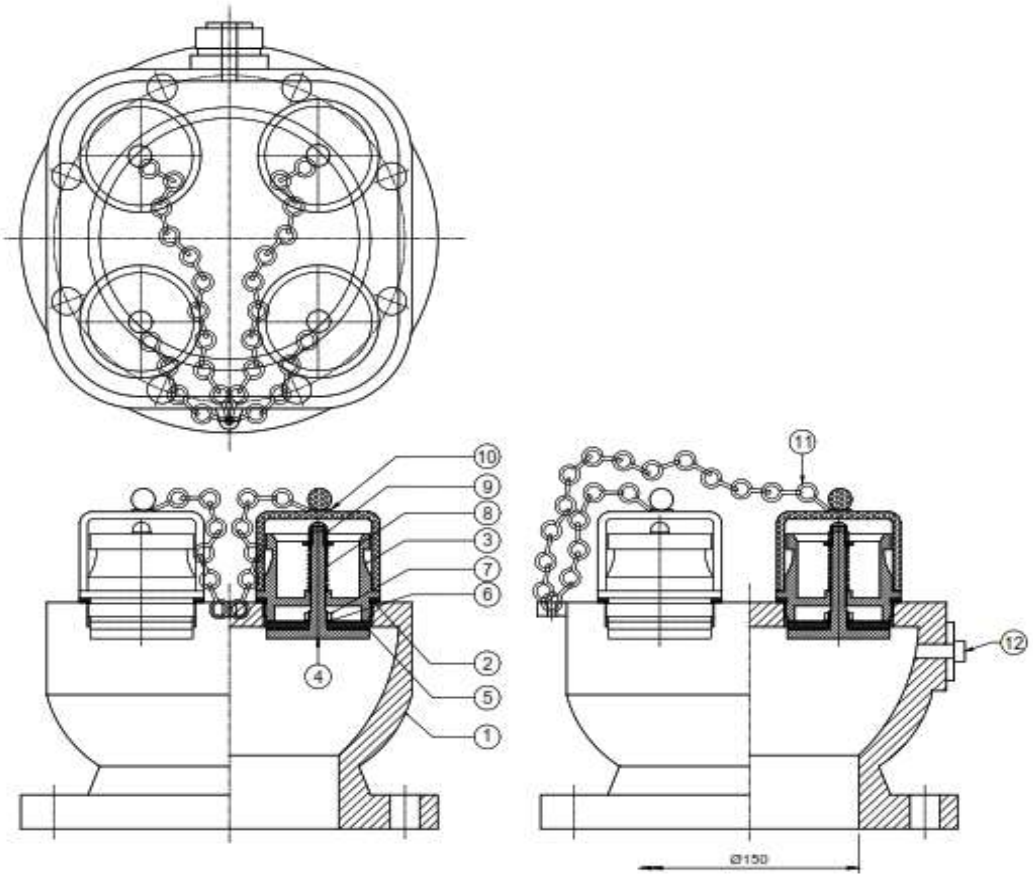

PART LIST	
SR. NO	DESCRIPTION
1	BODY
2	FLAT WASHER
3	MALE PARTS FOR (N.R.V. -63MM)
4	SEAT VALVE
5	SEAT WASHER
6	WASHER
7	NUT
8	SPRING
9	LOCK NUT FOR SPRING
10	BLANK CAP
11	CHAIN
12	DRAIN CAP

FLANGE DIMENSIONS**				
STD./TABLE	FALANGE Ø	P.C.D.	NO. OF HOLES	HOLE Ø
IS 1538	280	240	8	22
AS PER CUSTOMER REQUIREMENT	**	**	**	**

Note: 1) All Dimensions are in mm if not specified.
2) Tolerance where not specified shall be ±0.5 mm.

Industrial Estate, Veera Desai Road, Andheri (W), Mumbai - 400053. Telephone : +91 22 2673 1828/ 2673 1852/ 4601 4392
WORKS: D-24/6, TTC Industrial Area, MIDC, Turbhe, Navi Mumbai - 400705. Telefax: 27634433 / 64512311/64523611.
Email : orders@intimefire.com, ho@intimefire.com **: Website:** www.intimefire.com

TECHNICAL DATASHEET FOR FOUR WAY INLET BREACHING	
DATASHEET NO. :	INTIME-TDS-011
CODE/STANDARD	IS 904
SIZE	63mm
INLET	Four Male Instantenous Inlet of 63 mm With Built in N.R.V
MATERIAL OF CONSTRUCTION	
Body	CI to IS:210
N.R.V. Male, Seat Valve	GM to IS:318 Gr. LTB II
Spring	IS:7608
Rubber Washer	Rubber to IS:937
Blank Cap	ABS Plastic
INSPECTION & TESTING	
Hydro Pressure Test	21 Kgf/cm2
MARKING	
Size	63mm
Year	Year of Manufacture