INTIME FIRE APPLIANCES PVT. LTD.
safe with intime
AN ISO 9001:2015 Certified Company

Document No.: INTM-2025-STP-FFX-SS
Date Last Updated: 30/05/2025

TECHNICAL DATA SHEET


Product Name	**FFX® LITHIUM-ION FIRE EXTINGUISHER** (Stored Pressure - SS Body)	
Model Number	**STP-FFX-SS-6**	**STP-FFX-SS-9**
Description	These stored pressure extinguishers (6 Kg, 9 Kg) use FFX® Lion Fluorine-Free Solution with nitrogen propellant. Constructed from 1.2 mm stainless steel, they feature a brass forged discharge valve, a rubber braided discharge hose, and a plastic nozzle.	



DIMENSIONS		
Diameter (±10 mm)	160 mm	180 mm
Height (±20 mm)	560 mm	560 mm
Sheet Thickness	1.2 mm	
Full Weight (Approx.)	9.2 Kg	12.8 Kg
MISCELLANEOUS		
Inspection & Testing	As per IS 2190	
Approvals	PED	BIS,PED
Marking	IS 15683:2018	
Refill & Care	IS 2190	BIS, PED
Packing	Corrugated boxes	
Included in the Box	Wall mounting bracket, Hose with Nozzle	

GENERAL INFORMATION		
Type	Stored Pressure	
Capacity	6 L	9 L
Fire Rating	2A:21B	4A:144B
Certification	CE/EN3	BIS/CE/EN3
MATERIAL OF CONSTRUCTION		
Ext. Medium	FFX® Lion Fluorine Free Solution	
Propellant	Nitrogen	
Body	Stainless Steel (IS 513)	
Neck Ring	SS Pipe	
Siphon Tube	PVC/Plastic	
Valve	Brass, M30x1.5 Male threaded	
P. Gauge/Indicator	IS 15683:2018	
Discharge Hose	Rubber braided hose (Burst pressure ≥55 bar)	
Discharge Nozzle	Plastic	
Mounting Bracket	MS - Chrome plated	
PERFORMANCE DATA		
Eff. Discharge Time	≥15 Sec	
Discharge Range	≥2 m	
% of Discharge	≥90%	
Temperature Range	5° to 60°C	
WP (Max)	15 bar	
Service P. (Max)	18 bar	
ROUTINE TESTS		
Hydro Pressure (Pt)	35 bar (3.5 MPa), Hold: 150 Sec	
Burst Pressure (Pb)	55 bar (5.5 MPa), Hold: 60 Sec	
Leakage Test	Inverted glass jar / Soap solution	

DESIGN DATA

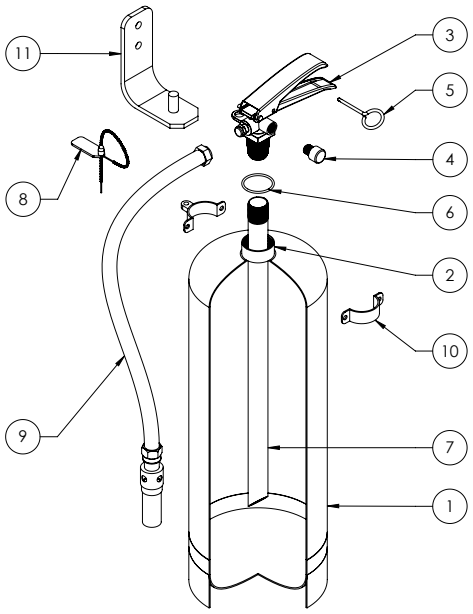

1. Cylinder
2. Neck Ring
3. Valve
4. Pressure Gauge / Indicator
5. Safety Pin
6. "O" Ring
7. Siphon Tube
8. Seal
9. Nozzle / Hose With Nozzle
10. Clamp
11. Wall Mounting Bracket

DISCLAIMER: The images, drawings, and data in this data sheet are for reference purposes only and may change without notice. Intime Fire Appliances Pvt. Ltd. is not responsible for their use or accuracy unless explicitly stated. All trademarks, service marks, logos, images, and CAD drawings in this document belong to their respective owners, and unauthorized use is strictly prohibited.
MANUFACTURED IN INDIA BY INTIME FIRE APPLIANCES PVT. LTD. © 1998–2025. ALL RIGHTS RESERVED.

21 A, Ghanshyam Industrial Estate, Off Veera Desai Road, Andheri West, Mumbai, Maharashtra, INDIA - 400 053
D/24/6, TTC Industrial Area, MIDC Turbhe, Navi Mumbai, Maharashtra, INDIA - 400 705
SafeWithIntime
+91 22 4601 4392 | +91 22 4016 5950 | ho@intimefire.com | www.intimefire.com